


COMBINATION  
BEARING  
for  
"I" PROFILE

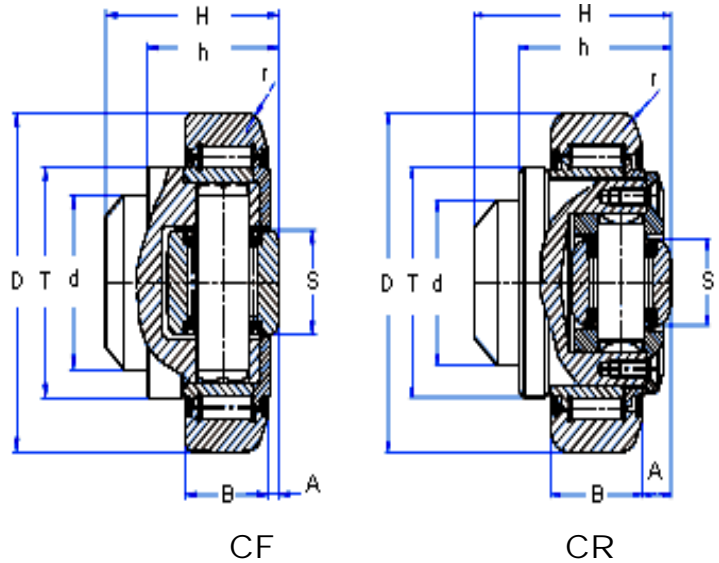

Part Number	d mm	T mm	D mm	H mm	h mm	B mm	A mm	S mm	r mm	C KN	Co KN	Ca KN	Coa KN	Weight kgs	Profile Type
CF4.055-40	35	48	70.1	40	30.5	23	2.5	22	4	45.5	51	14	13	0.80	3018
CF4.057-78	40	53	77.7	40.7	29	23	3	26	4	48	56.8	18	18	0.87	3019
CR4.075-78	40	54	77.7	45	34	23	7	21	4	48	56.8	14	14	0.92	3019
CF4.058-49	45	59	88.4	49	37	30	3.5	26	3	68	72	23	23	1.62	3020
CF4.059-101	50	67	101.2	46	33	28	3	30	3	73	82	25	27	1.74	3440
CR4.077-101	50	67	101.2	50.5	37.5	28	7	21	3	73	82	18	19	1.85	3440
CF4.060-108	55	71	107.7	53	39	31	3	34	5	81	95	31	336	2.27	3100
CR4.078-108	55	71	107.7	58.5	44.5	31	8	33	5	81	95	31	336	2.38	3100
CR4.259*	58	76	123	58	43	33	4.5	33	5	125	141	40	48	3.90	3353

\*special order only - minimum quantity applies

Other sizes available upon request

C	Dynamic Load
Co	Static Load
Ca	Axial Dynamic Load
Coa	Axial Static Load
Dr	O.D. on enquiry

Note:	Custom, close tolerance outside dimensions are available upon request.
-------	--